



# Cushion-Mount™ Plus Tapes

## with EH-Series Adhesive



*Easy Mount Adhesive that holds the edge on cylinder diameters as small as 2"*

3M EH-Series Tapes combine the air release of 3M E-Series Tapes with adhesive that resists edge lifting on small diameter cylinders. These ten tapes provide production enhancements for printers plus the print quality customers expect.

### On easy with reduced air entrapment

- Unlike flat or pebbled liners, crosshatched microchannels in EH-Series liners allow air to bleed from between the tape and plate, and between the tape and cylinder
- Helps eliminate bubble problems for easier, virtually error-free mounting
- Setup is faster with smoother surfaces for cleaner print quality and higher productivity

### Stays on with reduced edge-lifting

- Exclusive adhesive maintains tight contact between tape and plate to dramatically reduce edge lifting
- Saves prep, downtime, and labor of sealing plate edges

- Prevent blemishes in screen and process printing
- Help assure proper registration

### Balancing solids and dots for customer satisfaction

- Choice of constructions for solids or halftones, or combination solids and dots

### EH-Series and E-Series Selection Guide

#### Select EH-Series

E1820H, E1815H, E1720H, E1715H, E1020H, E1015H, E1920H, E1915H, E1120H, E1115H:

- Higher plate side adhesion
- Small diameter print cylinder
- 0.107" thick plate or greater
- Don't have time to clean back of plate

#### Select E-Series

E1820, E1815, E1720, E1715, E1020, E1015, E1920, E1915, E1120, E1115:

- Easier plate removal
- Larger diameter print cylinder
- 0.067" thick plate or less
- Clean back of plate

## 3M™ Combination Printing Tapes

## 3M™ Process Printing Tapes


**Firm Combination Printing EH Tapes with Foam Carrier**

**Medium Firm Combination Printing EH Tapes with Foam Carrier**

**Standard Combination Printing EH Tapes with Foam Carrier**

**Soft Combination Printing EH Tapes with Foam Carrier**

**Process Printing EH Tapes with Foam Carrier**

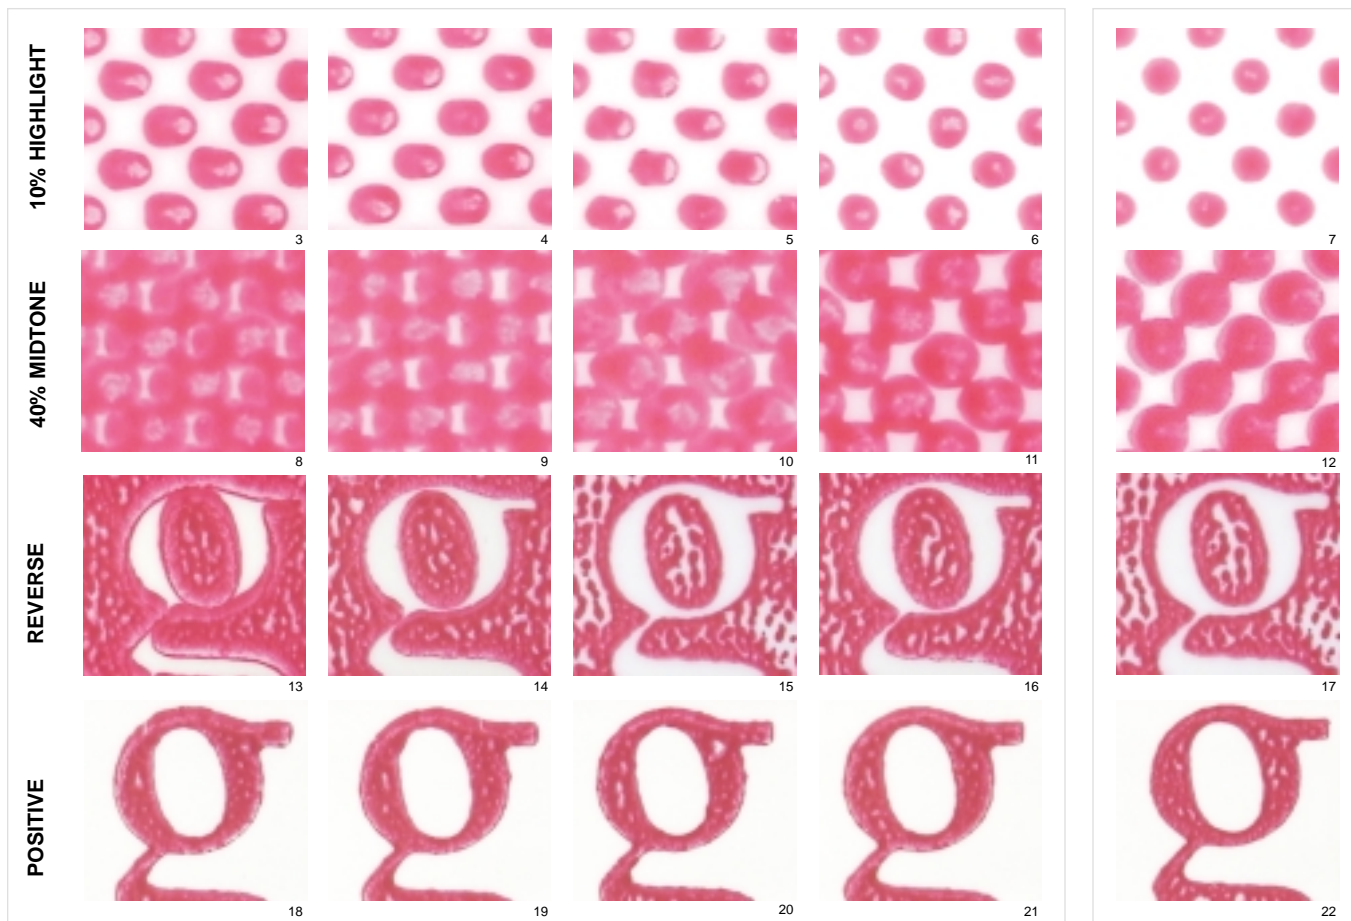

**E1820H, E1815H, E1820, E1815:**  
Mostly solids in combination of solid and halftone

**E1720H, E1715H, E1720, E1715:**  
Slightly more solids in combination of solid and halftone

**E1020H, E1015H, E1020, E1015:**  
Solid and halftone are equally important

**E1920H, E1915H, E1920, E1915:**  
Process and halftone predominate

**E1120H, E1115H, E1120, E1115:**  
High quality process work and screen printing

**NOTE ON SOLID AND DOTS REPRODUCTION:** 40x magnification on dots; 20x on positive and reverse type; process magenta ink on 2 mil polyethylene film; 1 mil impression at 88 fpm, 800 line, 2.4 bcm.

**PRODUCT USE:** All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

**WARRANTY AND LIMITED REMEDY:** Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to repair or replace the product or refund the purchase price.

**LIMITATION OF LIABILITY:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

**3M**

**Industrial and Transportation Business  
Industrial Adhesives and Tapes Division**

Customer Response Center  
900 Bush Avenue,  
Building 21-1W-10  
St. Paul, MN 55144-1000  
1-800-362-3550  
[www.3M.com/flexo](http://www.3M.com/flexo)

Printed in U.S.A.  
© 3M 2005 70-0709-5378-4